




# Local Registry

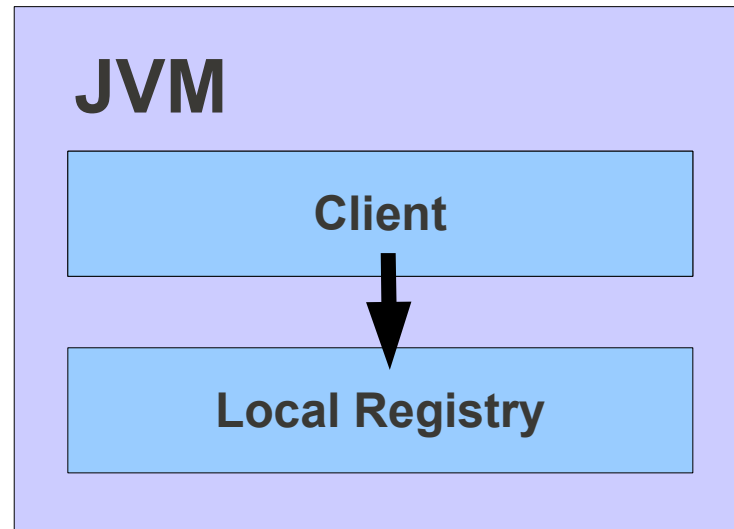


# Hibernate Registry

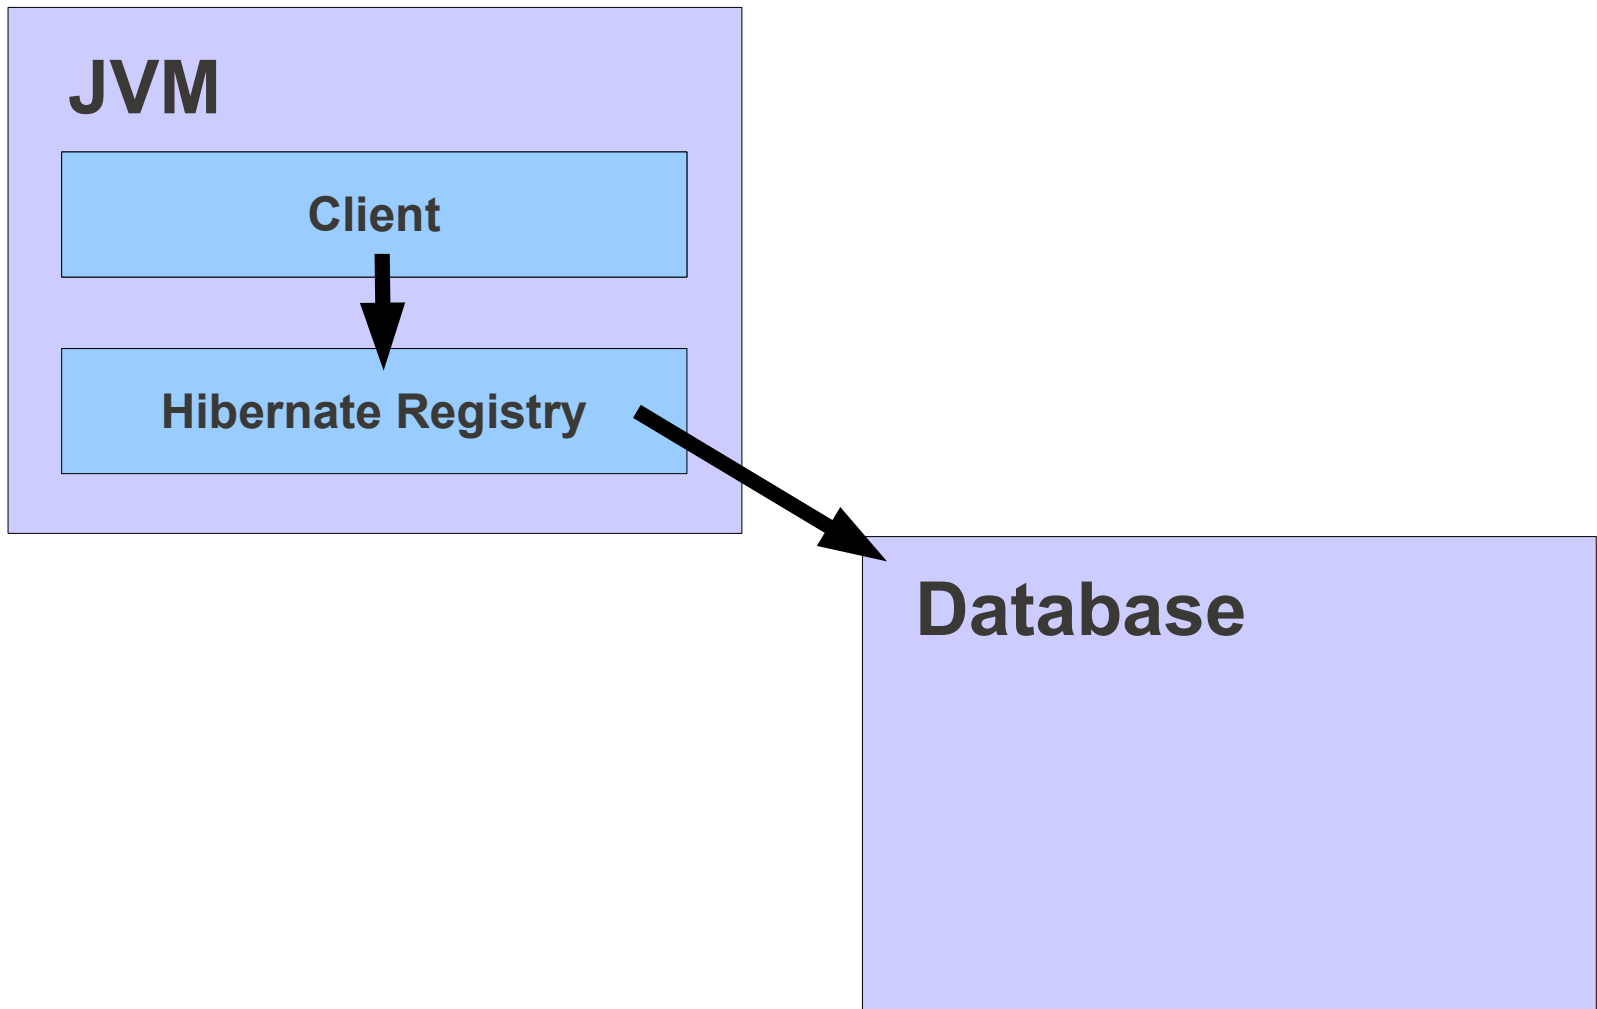


# Cache Registry

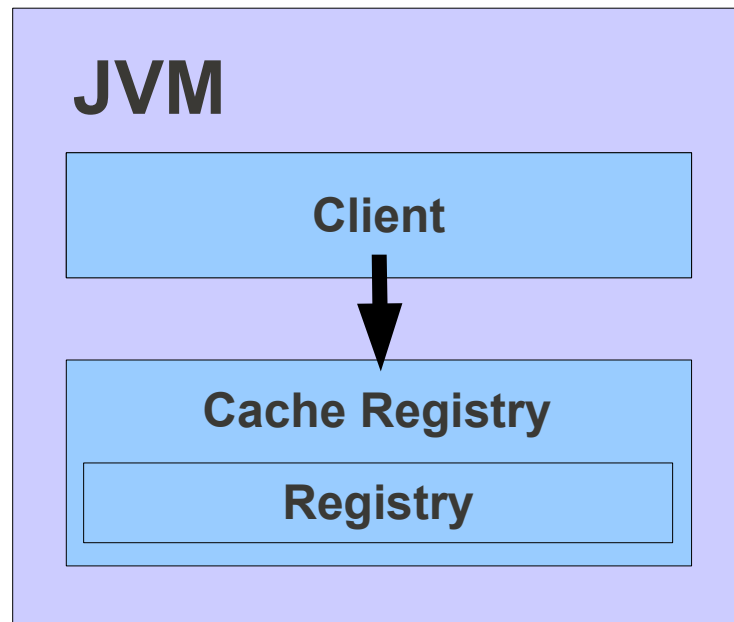

# Remote Registry

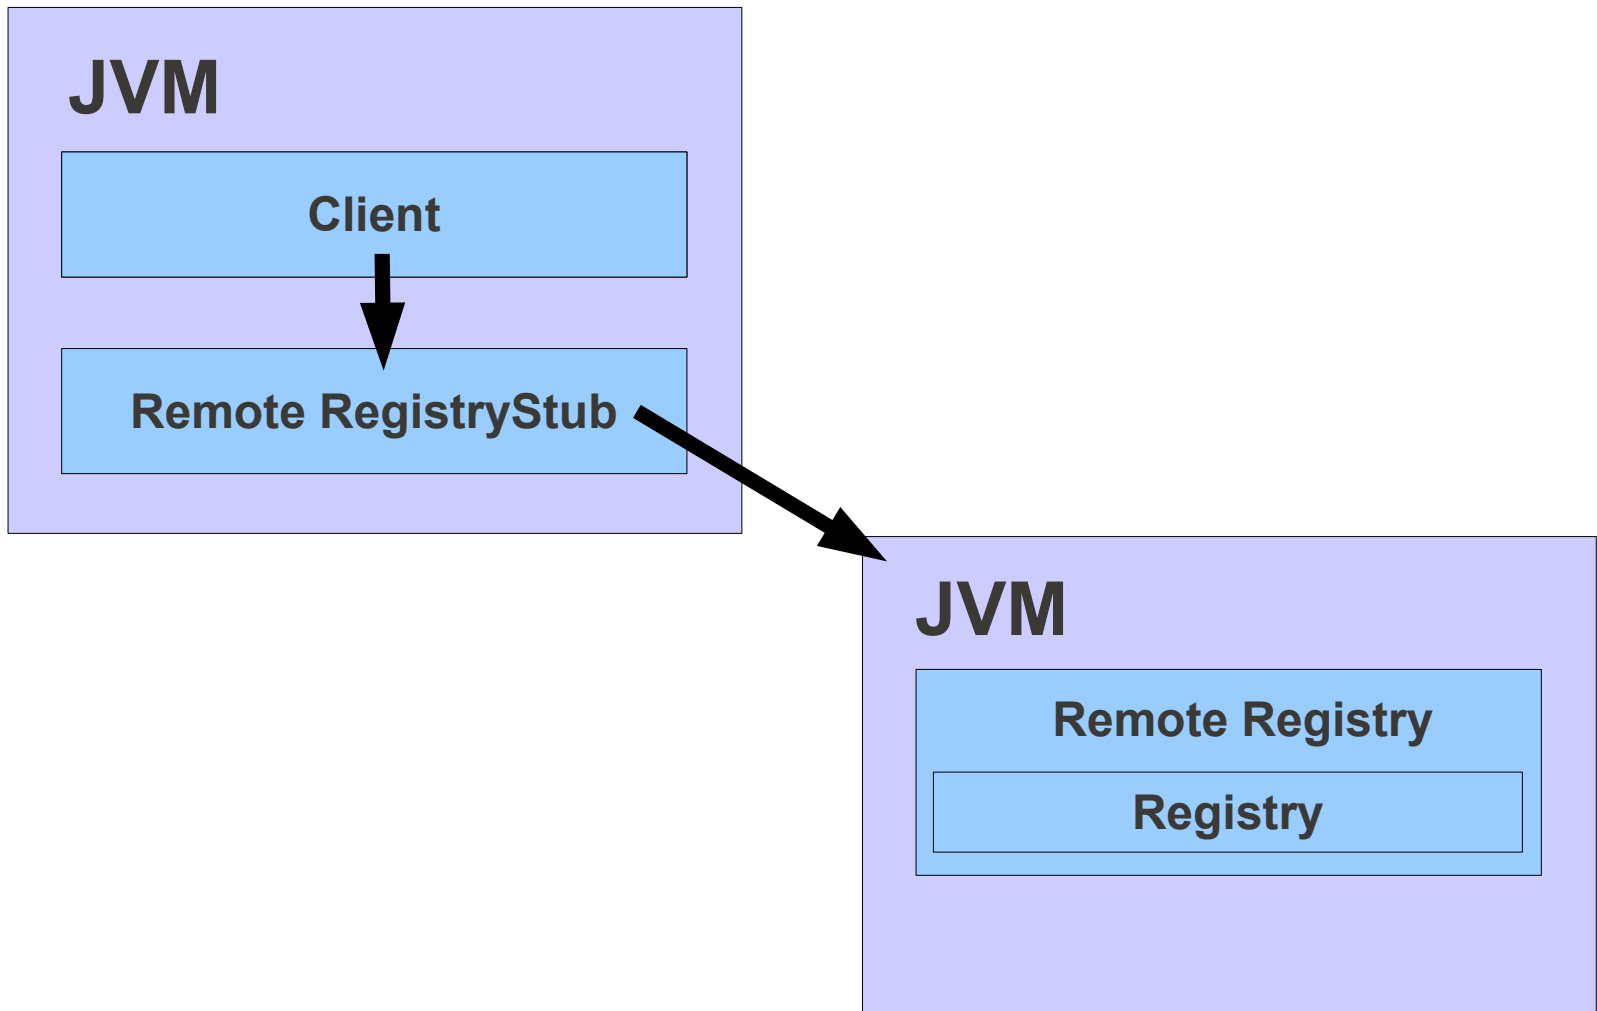


# Remote Cache Registry

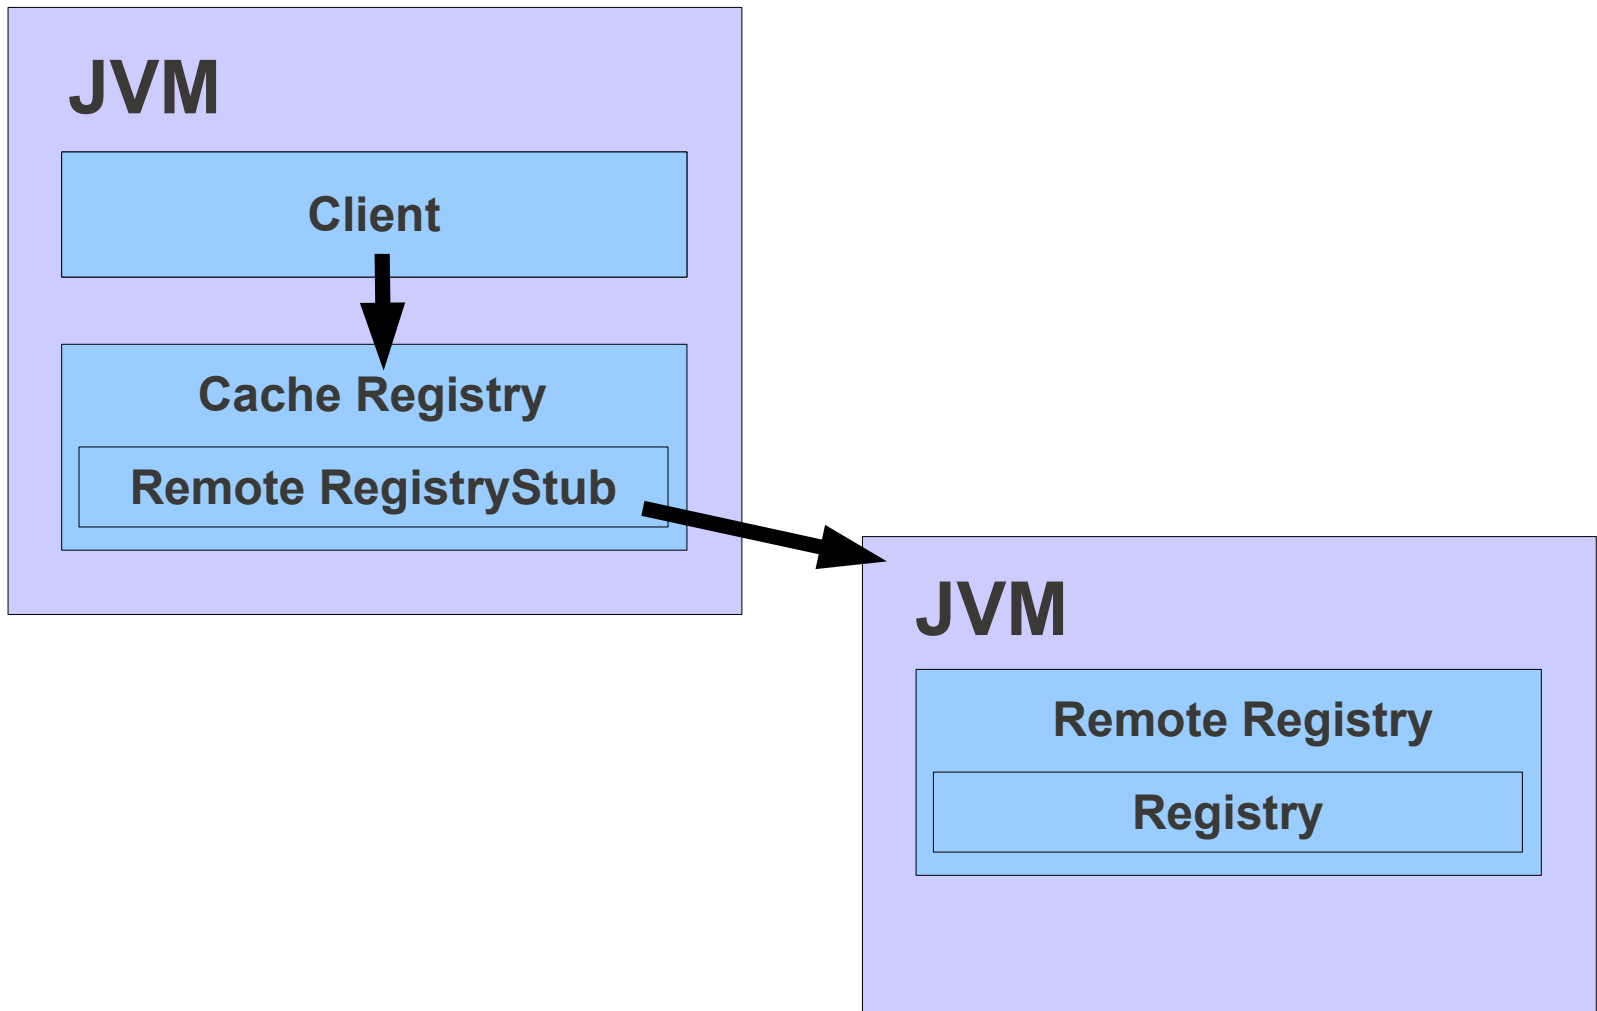


# Registry Server

- Multiple registry servers
- Fail-over at the stub
- If peer-to-peer mode is enabled:  
replication of configuration updates

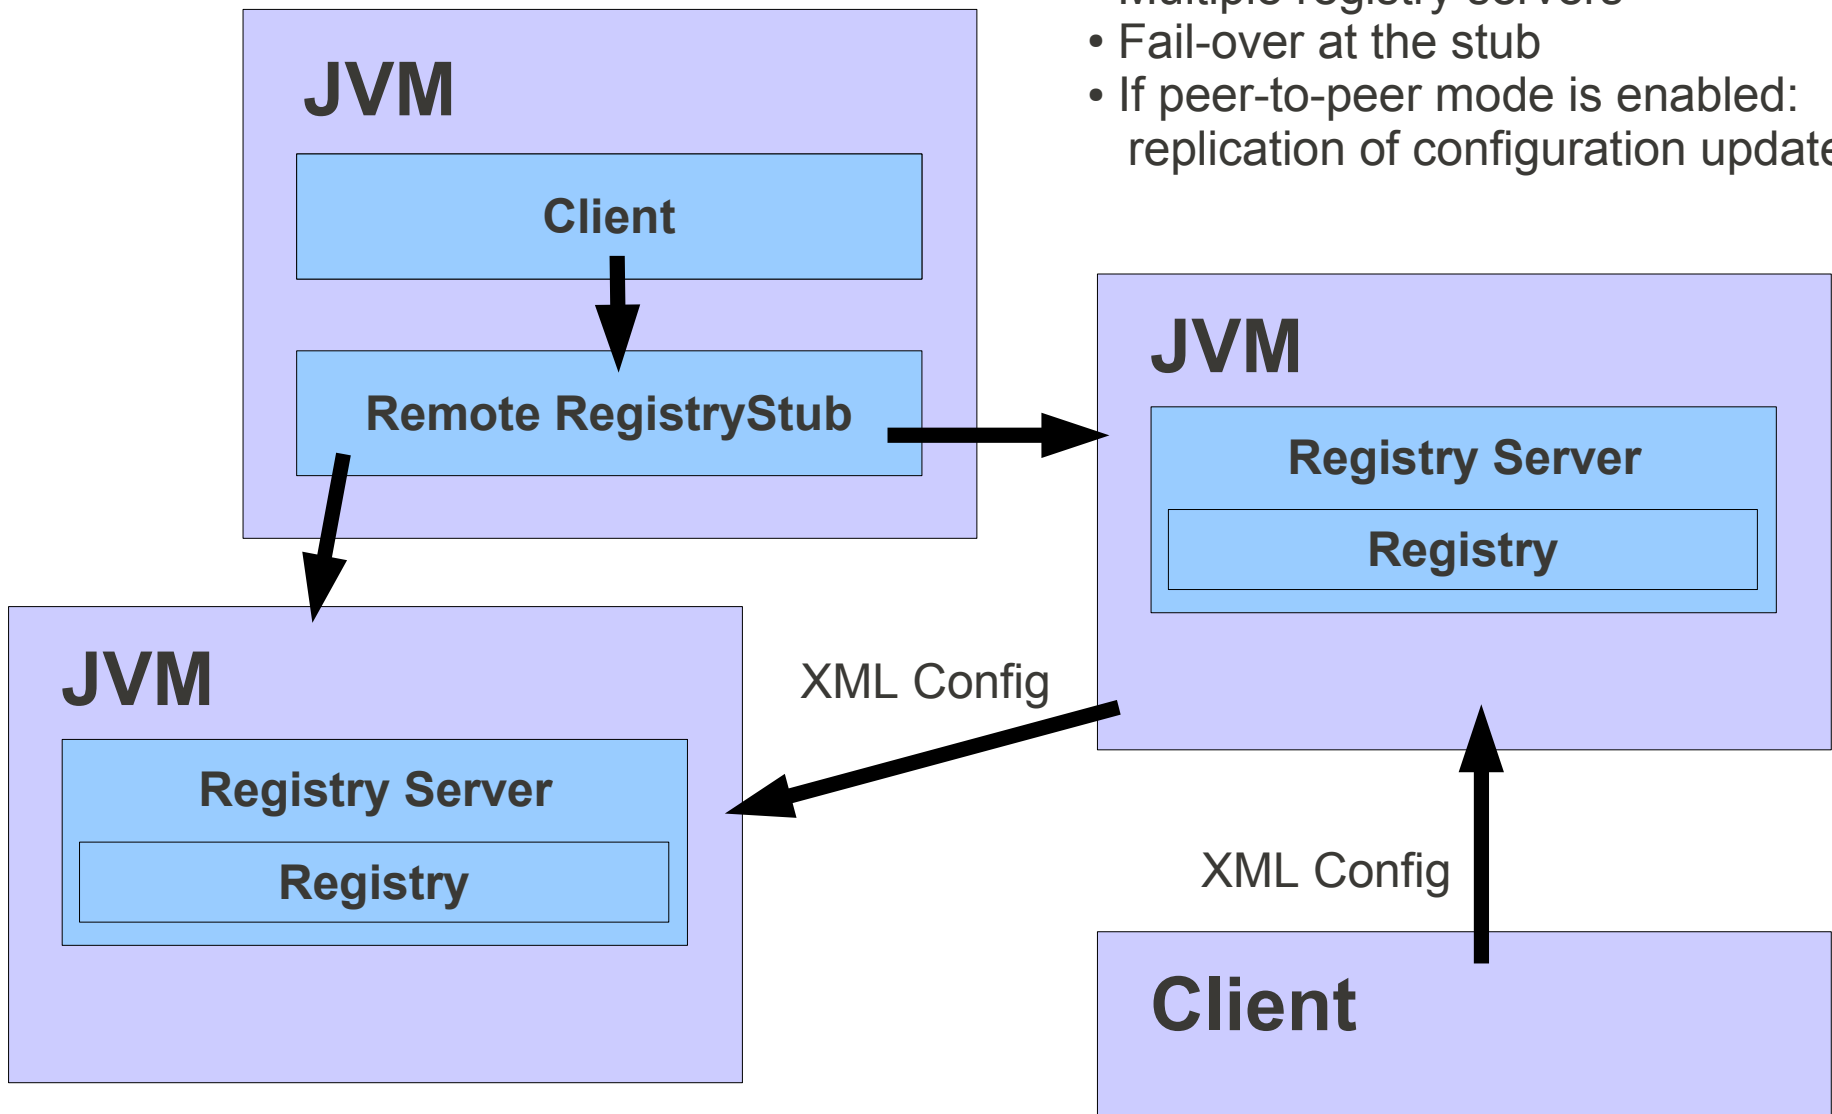

# Registry Server

## Scenario 1: Hibernate Registry

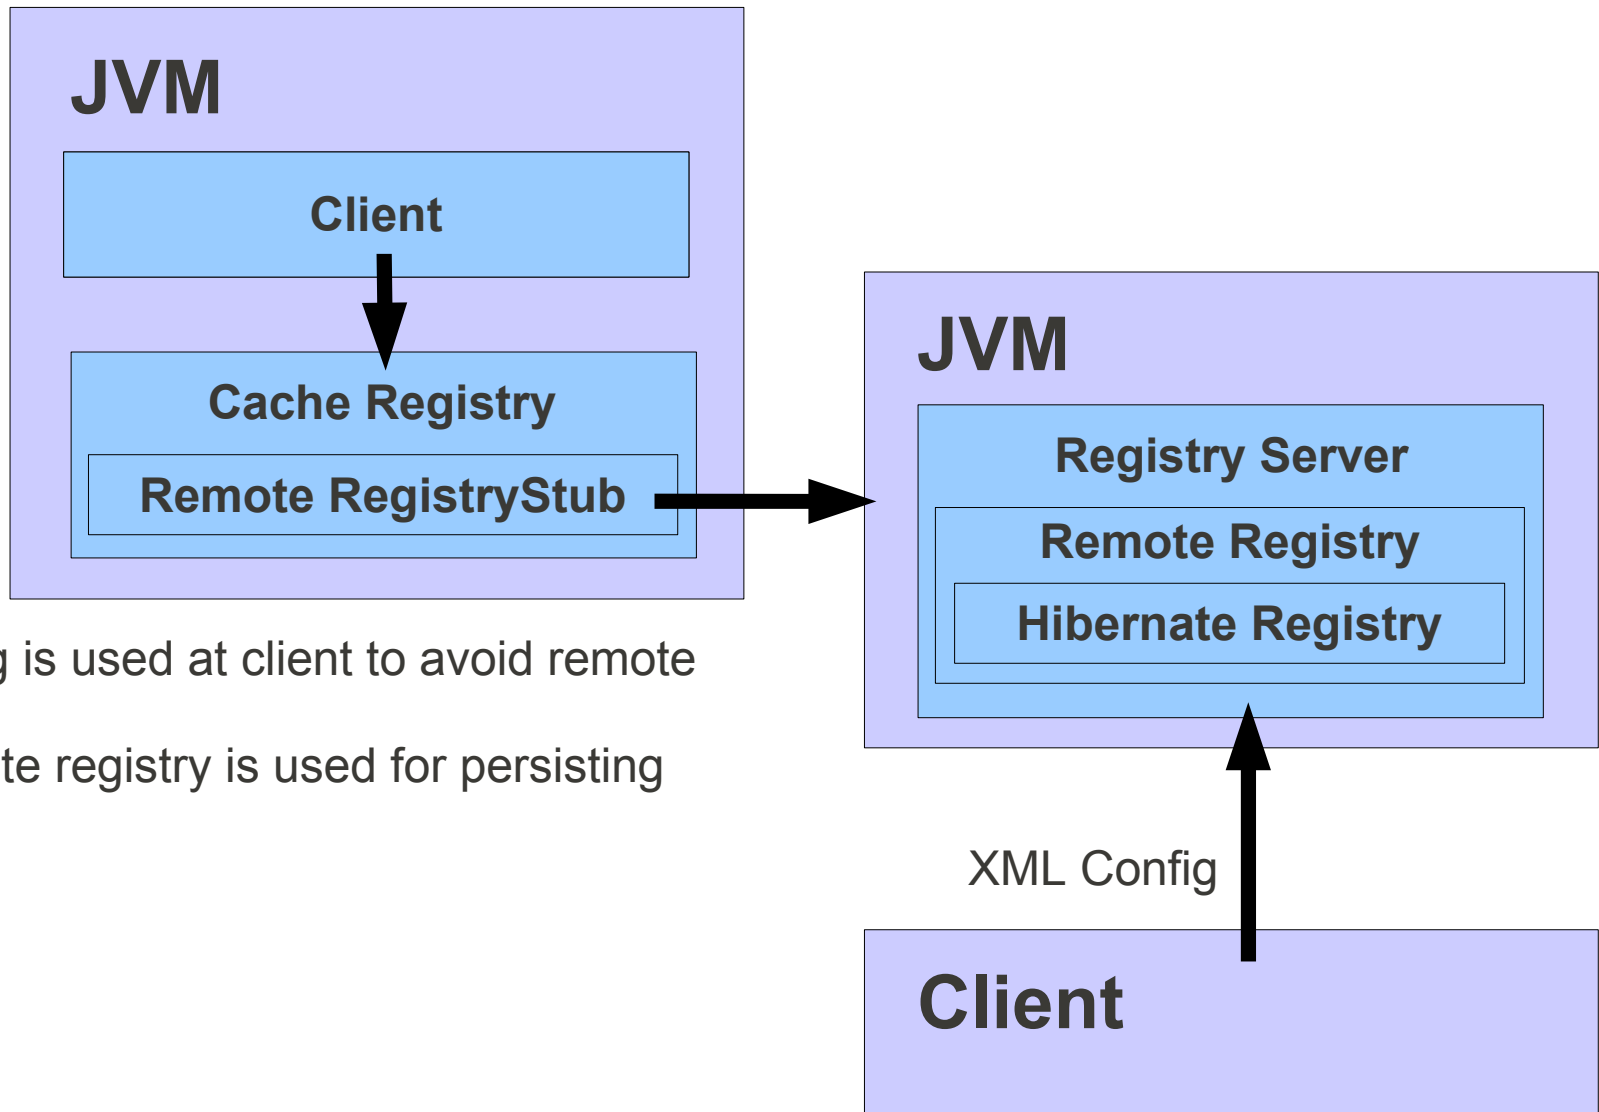

- Caching is used at client to avoid remote calls
- Hibernate registry is used for persisting config

# Registry Server

## Scenario 2: Local Registry with Bootstrap

